



NUC-CPO

GSM/3G Low Profile Puck Antenna

Features

- Low Profile Puck Antenna
- Supports GSM/3G frequencies
- Fully Waterproof when mounted
- Groundplane Independent

Specifications

Radiating element	1/2 wave Element
Frequency range	870-960/1710-2170 MHz
Peak gain	2-3 dBi
Polarisation	Linear
VSWR	<2.5:1
Power rating	10W
Cable / Connector	SMA-Male
Dimensions	102 x 33.5mm (dxh)

Ordering Options

NUC-CPO-1M	NUC-CPO with 1M RG-174 and SMA-Male
NUC-CPO-2M	NUC-CPO with 2M RG-174 and SMA-Male


Specifications subject to change without notice.

Nucleus Networks Limited
Horizon
Honey Lane
Hurley SL6 6RJ


Tel: +44 (0)20 8819 8550
Fax: +44 (0) 845 868 3625
Email: shop@nucleusnetworks.co.uk
Web: www.nucleusnetworks.co.uk

NUC-CPO | GSM/3G Low Profile Puck Antenna

Return Loss

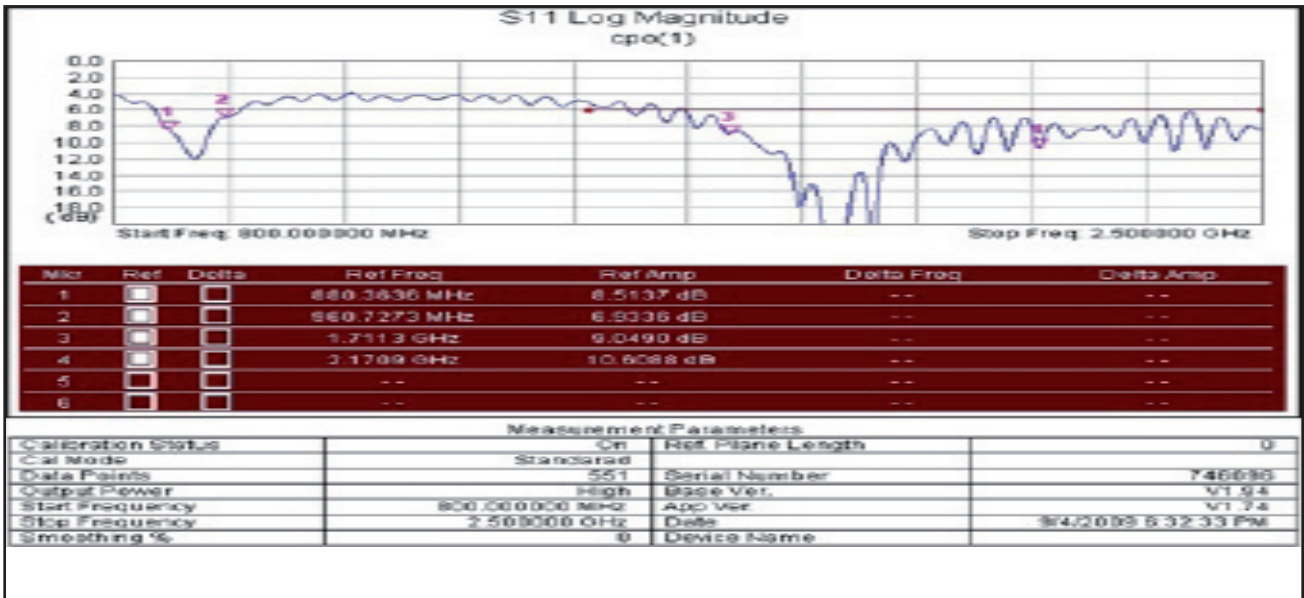

Outline Drawing

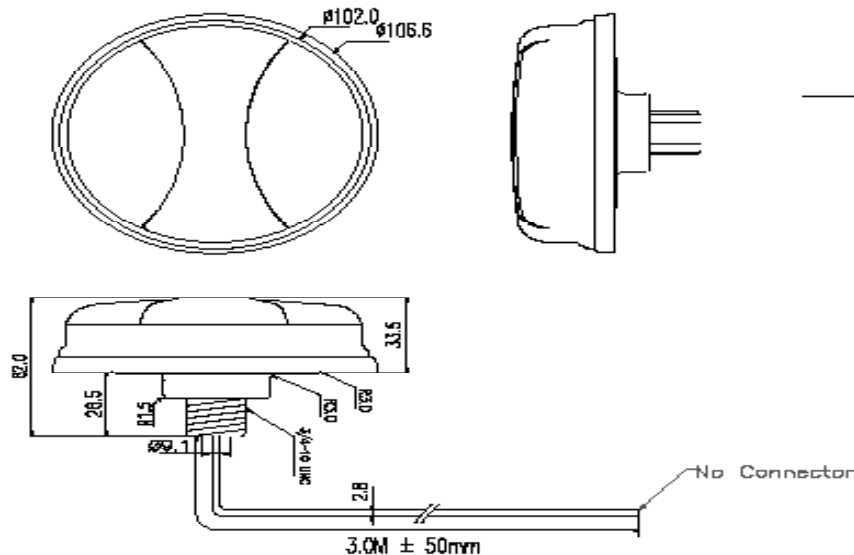

Specifications subject to change without notice.